

RECESSED



KT009
White finish



KT009B
Black matte finish



KT009C
Bright finish



KT009CS
Satin finish

Kit for recessed Machflow hand dryer

General description

- Kit for recessed Machflow hand dryer (hand dryer not included).
- The kit for recessed Machflow makes the Machflow hand dryer suitable for the compliance of the ADAAG norm (US) – that limits to 4 inches (100mm) the horizontal projection of the devices installed in bathrooms for public use-, bestowing on that hand dryer the quality of “specific for the disabled”.
- Maximum robustness and vandal-proof.
- Excellent integration and aesthetical level.

Components and materials


- WALL BOX:** is manufactured of two welded parts. The dryer mounting area is made of 1mm thick steel white finish (KT009) or 1 mm thick AISI 304 stainless steel satin finish (KT009CS). It includes 4 M5 bolts welded on top of the base plate for fitting of the Machflow hand dryer. The frame is fabricated of 0.7mm 18-8 type AISI304 stainless steel with 4 screw holes of Ø6.5mm for mounting on the wall.
- NUTS AND BOLTS:** for hand dryer fitting to the kit. It includes: 4 nuts DIN 934 M5, 4 washers DIN 9021 M5 and 4 rubber silent blocks 8 x 18mm.

NOTE: screws and wall plugs for mounting the cabinet to the wall are not included. The use of stainless steel screws is recommended.

Technical specifications

Dimensions	375 x 595 x 77 mm
Wall hole dimensions	330 x 550 x 77 mm
Wall box thickness	1.0 mm
Frame thickness	0.7 mm
Net weight	3 Kg

Dimensions

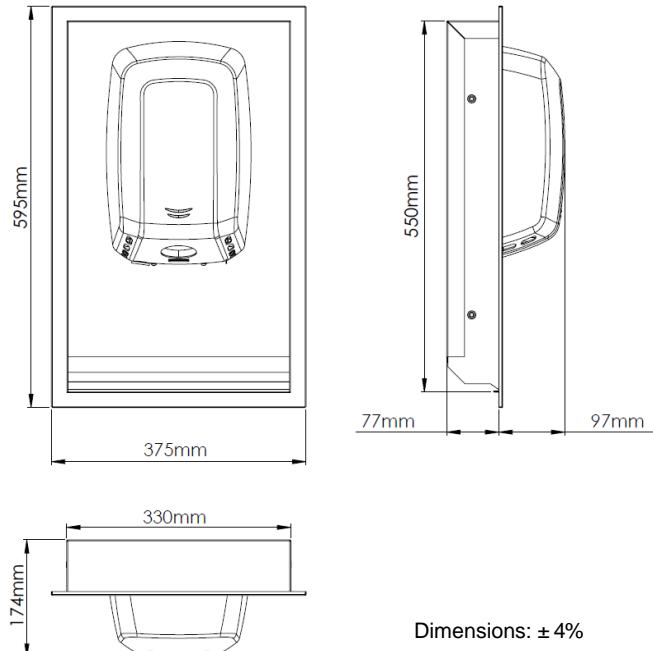

Hand dryer not included

Mounting

When installed, bottom of hand dryer will be 190mm above bottom of rough wall opening.

Recommended heights distance from the floor

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.
Review 07-25

© mediclinics S.A.

