

BtM

Soap dispenser + Water faucet + Paper dispenser



BTM03 (Closed)



BTM03 (Open)

**General description BTM03:**

- Complete sanitary cabinet featuring a lockable mirror. Includes a touch-free faucet for premixed water (optional mixing valve available), touch-free soap dispenser, paper towel dispenser and LED pictograms.
- Cabinet made with a black matt finish DM black wood and have a front door that includes a mirror.
- The mirror has frontal backlit pictograms for each function (soap, water and paper).
- The door top hung opened, is key locked and has 2 pneumatic pistons that helps the opening and closing process.
- Drastically reduces water and soap consumption (faucet & soap dispenser).
- No physical contact, protecting users against cross contamination.
- Sensor settings and soap dosage adjustable (faucet & soap dispenser).
- A single electrical point is enough to power all the cabinet elements and pictogram backlights.
- If the mirror is broken no mirror pieces will fall down.
- Available with hand dryer instead of towel paper dispenser, model BTM02
- Easy installation cabinet.

**Components and materials:**

- **WATER, sensor operated faucet (GA024BTM):** wall-mounted and water-saving solution for a rational and intelligent use of water made of ABS / inox bright finish
- **PAPER, towel dispenser (DT024BTM):** Stainless steel body AISI 304, for integration behind the mirror.
- **SOAP dispenser (DJ024BTM):** touch free electronic dispenser for a hidden installation behind the mirror, made of ABS / inox bright finish

---

### **Sensor operated faucet (GA024BTM)**

---

- Energy-efficient: Powered by a reliable 6 V power adaptor for long-lasting performance.
- Customizable settings: Easily adjust the water outlet direction for optimal use and comfort.
- Water flow <2 l/min (other flows optional)
- Operating rate 220-240 V, 50/60 Hz
- 4x LR6 battery case (Optional)
- Detection range, magnet adjustable
- Weight: 2.1 kg

---

### **Paper towel dispenser (DT024BTM)**

---

- Body thickness 0.8 mm
- Bracket mounted included
- Capacity 600 C/Z fold towers
- Weight: 2.8kg

---

### **Soap dispenser (DJ024BTM)**

---

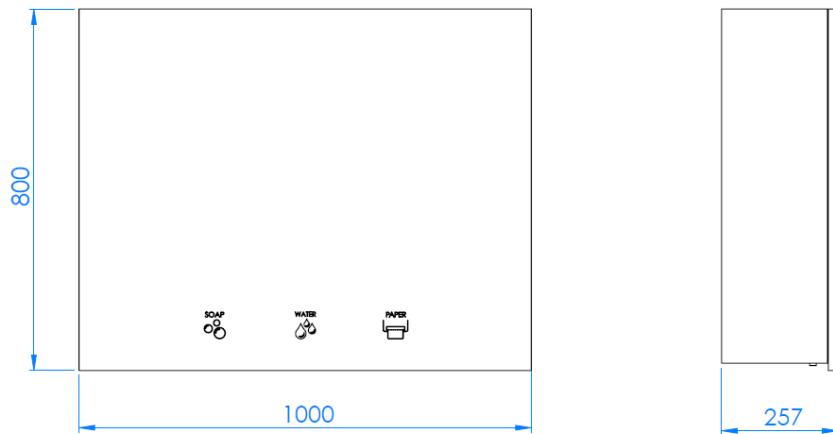
- Energy-efficient: Powered by a reliable 6 V power adaptor for long-lasting performance.
- Customizable settings: Easily adjust the soap outlet direction for optimal use and comfort.
- Soap viscosity (Gel:1-3.500 cps / Foam: 1-20 cps)
- Soap tank capacity: 1.8 l
- Suitable for other tank sizes, including standard 5 liter plastic drum (provided by user)
- Operating rate 220-240 V, 50/60 Hz
- 4x LR6 battery case (Optional)
- Detection range, magnet adjustable
- Weight: 3.8 Kg

---

### **Technical specifications (BTM03 Cabinet)**

<b>Weight</b>	45.7 kg
<b>Material</b>	DM black wood / glass
<b>Paper</b>	See data sheet DT024BTM
<b>Water</b>	See data sheet GA024BTM
<b>Soap</b>	See data sheet DJ024BTM
<b>Pictogram backlight</b>	<10W
<b>Cabinet backlight</b>	<16W

---

**Dimensions:**

Dimensions: ± 4%

---

**Text for prescription**

Hygiene cabinet shall be composed of three integrated elements: a paper towel dispenser, a sensor-operated faucet, and a sensor-operated soap dispenser. The cabinet shall weigh 45,70 kg. It shall be manufactured from moisture-resistant DM wood with a matte black finish and shall include a front mirror door with LED pictograms indicating each component. The sensor faucet shall be equipped with an infrared sensor located at the bottom. The faucet shall weigh 2,10 kg. It shall operate at a frequency of 50/60 Hz and a voltage of 220–240 V, or alternatively on 4x LR6 1,5 V batteries. Water flow rate shall be less than 2 L/min (other flow rates available). Motion detection distance shall be adjustable via magnet between 5 and 25 cm. The soap dispenser shall be equipped with an infrared sensor located at the bottom. The dispenser shall weigh 3,80 kg. It shall operate at a frequency of 50/60 Hz and a voltage of 220–240 V, or alternatively on 4x LR6 1,5 V batteries. The soap tank shall have a capacity of 1,80 L. Soap viscosity shall range from 1 to 3.500 cps for gel and from 1 to 20 cps for foam. Motion detection distance shall be adjustable via magnet between 5 and 25 cm. The paper towel dispenser shall be manual. It shall weigh 2,80 kg. The housing shall be made of AISI 304 stainless steel. It shall have a capacity of 600 Z-fold paper towels or 400 C-fold paper towels.

---

**Operation behind the mirror cabinet**

- Touch free electronic system. The faucet and soap dispenser are automatically active when user place their hands in the sensor range and stops when the users remove their hands.
- Active infrared sensing operation that also helps to optimize the flow rate water, soap and air and thereby supporting long-term ecological balance.
- Effective sensor range detection of 5-25 cm.



Hygienic



Adjustable Setting



Easy to install



ADA designed



Pending

---

**Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.**

Review 10-25 Mediclinics S.A.