

RECESSED

Kit for recessed Mediflow hand dryer



KT0010
White finish



KT0010B
Black finish



KT0010C
Bright finish



KT0010CS
Satin finish

General description

- Kit for recessed Mediflow hand dryer (hand dryer not included).
- The kit for recessed Mediflow makes the Mediflow hand dryer suitable for the compliance of the ADAAG norm (US) – that limits to 4 inches (100mm) the horizontal projection of the devices installed in bathrooms for public use-, bestowing on that hand dryer the quality of "specific for the disabled".
- Maximum robustness and vandal-proof.
- Excellent integration and aesthetical level.

Components and materials


- CABINET:** made of electro-zinced iron, 1.5 mm thick, with 16 screw holes of Ø 6 mm for wall mounting. It includes 4 M5 bolts welded on top of the base plate for the fitting of the Mediflow hand dryer.
- FRAME:** 1.5 mm thick, made of steel white finish (KT0010) or black finish (KT0010B) or AISI 304 stainless steel bright finish (KT0010C) or satin finish (KT0010CS), with 4 screw holes of Ø 9 mm for mounting on the wall.
- GASKET:** made of grey rubber, offers a reinforcing outside protection that minimizes vibrations and noise.
- NUTS AND BOLTS:** for fitting the dryer to the kit and the frame to the wall includes: 4 nuts DIN 934 M5, 4 washers DIN 125 M5, 4 stainless steel screws DIN 7981 32 x 5,5 mm and 4 wall plugs F8.

NOTE: nuts and bolts for mounting the cabinet to the wall are not included. Use of stainless steel nuts and bolts is recommended.

Technical specifications

Dimensions	340 x 481 x 75 mm
Cabinet thickness	1.5 mm
Frame thickness	1.5 mm

Dimensions

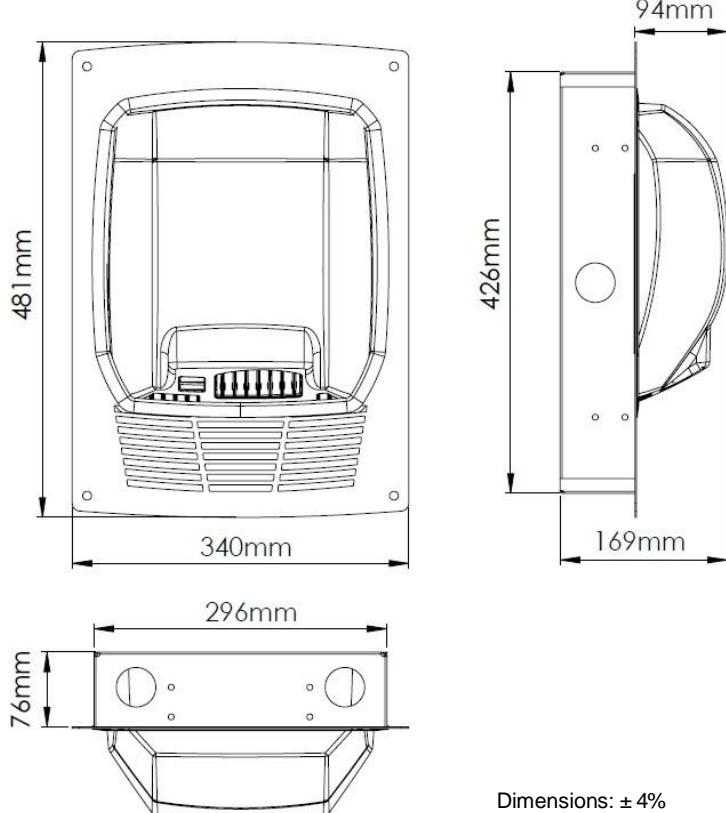

Hand dryer not included

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.
Review 07-25

© mediclinics S.A.

