

BINS

Open waste receptacles



PPA4279
White finish



PPA4279B
Matte black finish



PPA4279C
Bright finish



PPA4279CS
Satin finish

General description

- Open waste receptacle, 40 L of capacity with inner plastic ring for bag holder. For standing on the floor or wall mounting by means of 4 slot holes drilled on the back of the appliance.
- With an attractive and robust design, this bin is modern and elegant, as well as very resistant and functional.
- Fully welded, with solid corners free of burrs and sharp areas.
- Suitable for bathrooms and in-doors public areas with high traffic of people. Model suitable for public use.
- Wall-mounted option using 4 screws and plugs (**not supplied**).


Components and materials

- **PPA4279**: steel white Epoxy finish, 0.8 mm thick.
- **PPA4279B**: steel black Epoxy finish, 0.8 mm thick.
- **PPA4279C**: stainless steel AISI 304, bright finish, 0.8 mm thick.
- **PPA4279CS**: stainless steel AISI 304, satin finish, 0.8 mm thick.
- **BODY**: made of steel (PPA4279 and PPA4279B) or AISI 304 stainless steel (PPA4279C and PPA4279CS), 0.8 mm thick and welded to the back plate.
- **BACK PLATE**: made of steel (PPA4279 and PPA4279B) or AISI 304 stainless steel (PPA4279C and PPA4279CS), 0.8 mm thick with 4 slot holes for wall mounting.
- **BASE**: made of steel (PPA4279 and PPA4279B) or AISI 304 stainless steel (PPA4279C and PPA4279CS), 0.8 mm thick and welded to the body.
- **SWING RING**: made of black PP plastic for bag holder.

Technical specifications

Dimensions	708 x 355 x 176 mm
Capacity	40 L
Body thickness	0.8 mm
Weight (empty)	5 Kg

Dimensions

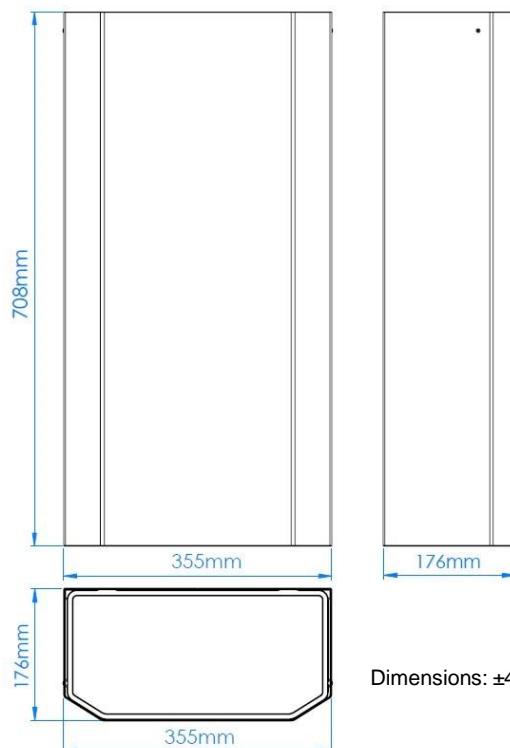

MOUNTING TEMPLATE

Secure the frame with mounting screws into the holes for wall-mounted option.

TEXT FOR PRESCRIPTION

Open rectangular waste bin with polypropylene tilting ring shall hold the bag. The empty bin shall weigh 5,0 kg. The body shall be steel in white or black finish, or AISI 304 stainless steel in bright, satin, or various PVD finishes. Body and base shall be 0,8 mm thick. The unit may be placed on the floor or wall-mounted with 4 screws and 4 plugs. Capacity shall be 40 L.