



BARRA ABATIBLE DESMONTABLE CON SOPORTE A PARED - SERIE LEONARDO

removable folding bar complete with wall support - series Leonardo

	cm	Kg
E-LEOB62/01	62	2,5
E-LEOB77/01	77	2,8
E-LEOB85/01	85	3,0



blanco
brillante
RAL 9016

otros colores
RAL

01

99



Características:

Barra de seguridad desmontable, tipo abatible, con bloqueo por fricción vertical. compuesta por 4 piezas de acero, con tratamiento anticorrosión, recubiertas de material epoxi-poliéster antidesgaste en color blanco RAL 9016, con propiedades antibacterianas de sales de plata, bio-Goman, en tubo de Ø32x1,5 mm, con refuerzo intermedio. Completo con placa de acero inoxidable con sistema de bloqueo de pared no permanente para fijación a pared, 2 tacos de bloqueo de acero, tornillo de unión Ø8, embrague en material sintético termoplástico. Capacidad de carga kg 150.

Specifications:


Removable safety bar, folding type, with vertical clutch lock. Composed of 4 steel pieces, with anti-corrosion treatment, covered with anti-wear epoxy polyester material, color white RAL 9016, with antibacterial proper-ties of silver salts, bio-Goman, in tube Ø32x1.5 mm, with intermediatereinforcement, stainless steel plate with non permanent wall locking system for wall mounting, 2 steel locking grubs, Ø8 union screw, synthetic thermoplastic clutch. Load capacity kg 150. Dimensions mm 110 (d) x 620 (p) x 220 (h). Goman code: E-LEOB62/01. Dimensions mm 110 (d) x 770 (p) x 220 (h). Goman code: E-LEOB77/01

Dimensiones en mm 110 (an) x 620 (p) x 220 (h).

Código Goman: E-LEOB62/01.

Dimensiones en mm 110 (an) x 770 (p) x 220 (al).


Código Goman: E-LEOB77/01

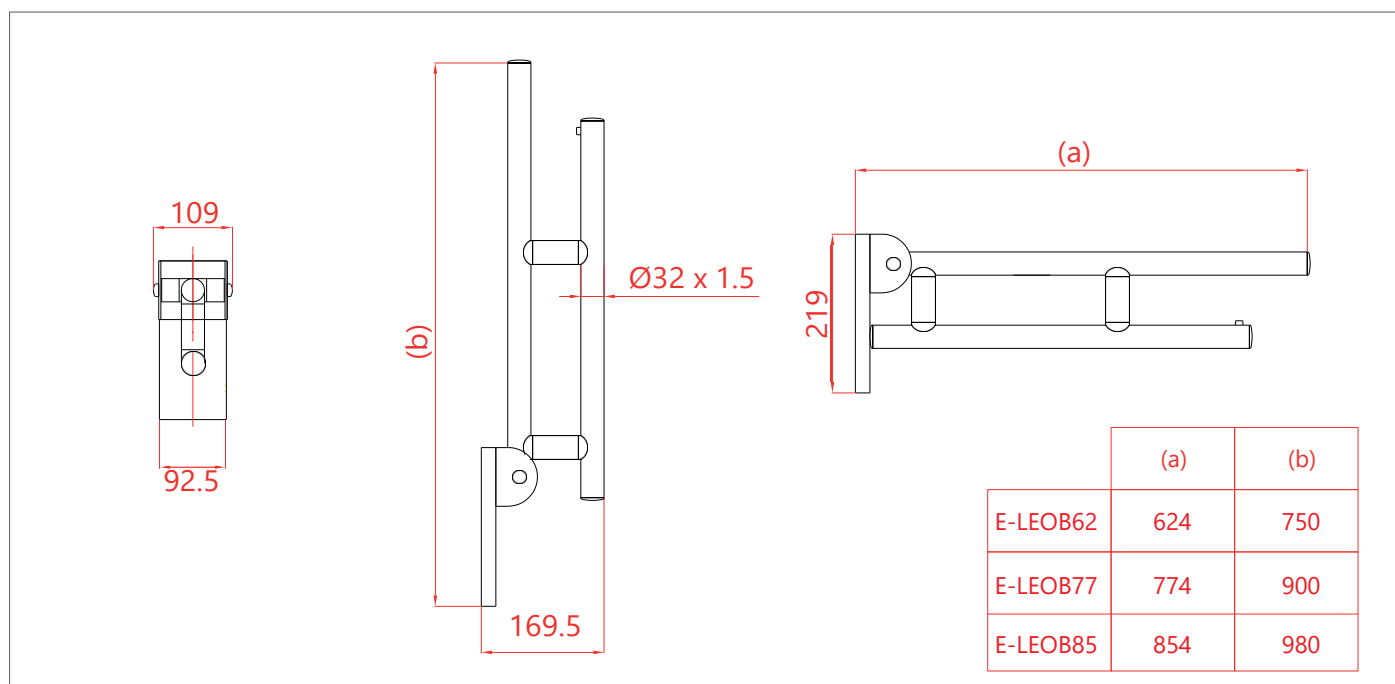

1

INSERTAR EL SOPORTE DE LA BARRA ARRIBA
EN LA PLACA DE PARED


INSERT THE BAR SUPPORT FROM ABOVE ONTO
THE WALL PLATE

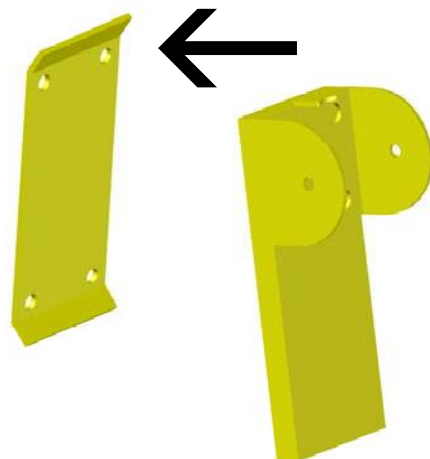

2

GIRE EL SOPORTE PARA AJUSTARLO COMPLETA-
MENTE EN LA PLACA DE PARED

ROTATE THE SUPPORT SO THAT IT IS COMPLETELY
INSERTED ON THE WALL PLATE

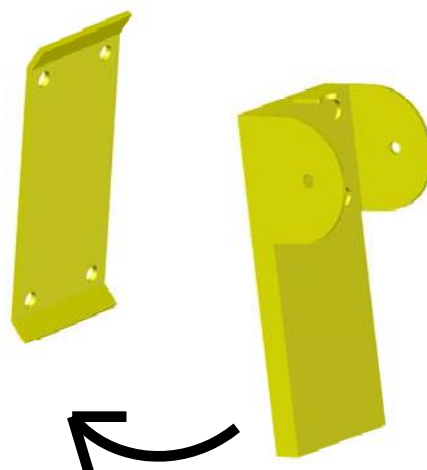

3

FIJAR EL SOPORTE EN LA PLACA DE PARED
ATORNILLANDO LOS 2 TORNILLOS ROSCADOS
EN LA PARTE INFERIOR

FIX THE SUPPORT ON THE WALL PLATE BY
SCREWING THE 2 HEADLESS SCREWS ON THE
LOWER SIDE

